



*Picture for illustrative purposes only

DESIGN SPECIFICATIONS

- ✓ High quality, reliable and complete power unit
- ✓ Compact design
- ✓ Easy start and maintenance
- ✓ Fully tested for load, controls and safety shutdown functions
- ✓ Fully engineered with a range of optional extras and accessories.


415/240V 50 Hz	Generating Set Model		JSP 600
Power Factor 0.8	Prime	kVA	600
		kW	480
	Standby	kVA	660
		kW	528

Prime: Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period. In accordance with ISO 8528, ISO 3046.
Standby: Continuous running at variable load for duration of an emergency. No overload is permitted on these ratings. In accordance with ISO 3046, BS 5514.

TECHNICAL DATA*			
Engine Model	Perkins 2806A-E18Tag1A	Alternator	Newage Stamford
Number of Cylinders	6 in-line	Heat Rejection to Exhaust (Max)	442.1kW
Cubic Capacity	18.13 litre	Heat Rejection to Cooling System (Max)	222.0kW
Aspiration	Turbocharged	Exhaust Temperature (Max)	571 deg C
Engine Speed (RPM)	1500 rpm	Combustion Air Flow (Max)	36.0 cu m/min
Frequency	50 Hz	Fuel Tank Capacity‡	1,500 litre
Amperage	832 amp per phase	Fuel Consumption at Full Rating	123.0 litre per hour

DIMENSIONS*	
Length (A)	5,750 mm
Width (B)	1,950 mm
Height (C)	2,291 mm
Total Height of exhaust rain cap (D)	2,441 mm
Max Horizontal projection of end door (E)	995 mm
Max Horizontal projection of side doors (F)	1,105 mm
WEIGHT*	
Wet (with lube oil and coolant)	6,600kg

‡ Bundled fuel tank capacity may reduce in size

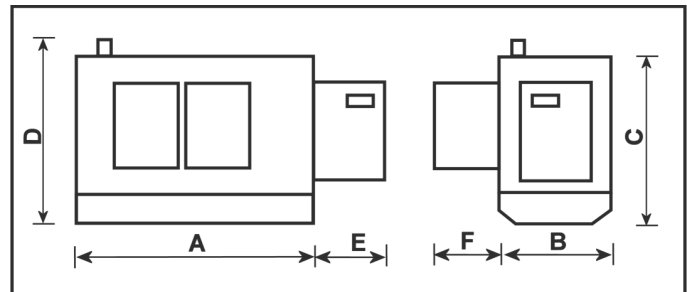

SOUND LEVELS*			
Load	15m	7m	1m
100%	TBA	TBA	TBA
75%	TBA	TBA	TBA

FEATURES*	Manual Start, Main Power Set		Automatic Start, Standby Set	
	Standard	Optional	Standard	Optional
Sound Attenuated, Weatherproof Canopy	✓		✓	
Base Fuel Tank	✓		✓	
DEFRA Bunded Base Fuel Tank (Standard on UK Models)‡		✓		✓
Oil, Fuel & Air Filters	✓		✓	
Coolant Water Heater			✓	
Lube Oil Drain	✓		✓	
Vibration isolated Control Panel	✓		✓	
Manual Control Panel	✓			
Auto Start Control Panel			✓	
Integral 5A Battery Charger			✓	
Automatic Transfer Panel				✓
12 Months International Warranty	✓		✓	
Output Circuit Breaker	✓		✓	
CE Certification (Standard on UK / EU Models)		✓		✓
Service / Maintenance Contracts/ NetBiter Remote Monitoring		✓		✓

*Specifications subject to change without notice