



\*Picture for illustrative purposes only

## DESIGN SPECIFICATIONS

- ✓ High quality, reliable and complete power unit
- ✓ Compact design
- ✓ Easy start and maintenance
- ✓ Fully tested for load, controls and safety shutdown functions
- ✓ Warranted for B100 Bio Diesel at EN14214 Standard
- ✓ List of Optional Extras

415/240V 50 Hz	Generating Set Model		JSP BD 200
Power Factor 0.8	Prime	kVA	200
		kW	160
	Standby	kVA	220
		kW	176

**Prime:** Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period. In accordance with ISO 8528, ISO 3046.  
**Standby:** Continuous running at variable load for duration of an emergency. No overload is permitted on these ratings. In accordance with ISO 3046, BS 5514.

## TECHNICAL DATA\*

Engine Model	Sisu Diesel 634 DSRAG	Alternator	Mecc Alte
Number of Cylinders	6 in-line	Heat Rejection to Exhaust (Max)	165.0 kW
Cubic Capacity	7.40 litre	Heat Rejection to Cooling System (Max)	102.0 kW
Aspiration	Turbocharged	Exhaust Temperature (Max)	565 deg C
Engine Speed (RPM)	1500 rpm	Combustion Air Flow (Max)	12.5 cu m / min
Frequency	50 Hz	Fuel Tank Capacity‡	400 litre
Amperage	277 amp per phase	Fuel Consumption at Full Prime Rating	44.1 litre per hour

‡ Bundled fuel tank capacity reduced to 335 litres

## DIMENSIONS\*


Length (A)	3,700 mm
Width (B)	1,150 mm
Height (C)	1,975 mm
Total Height of exhaust rain cap (D)	2,100 mm
Max. Projection of open end door (E)	840 mm
Max. Projection of open side doors (F)	990 mm

## WEIGHT\*

Wet (with lube oil and coolant)	2,896 kg
---------------------------------	----------

## SOUND LEVELS\*

Load	15m	7m	1m
100%	63.8 dB(A)	69.8 dB(A)	80 dB(A)
75%	63.3 dB(A)	69.3 dB(A)	79.8 dB(A)

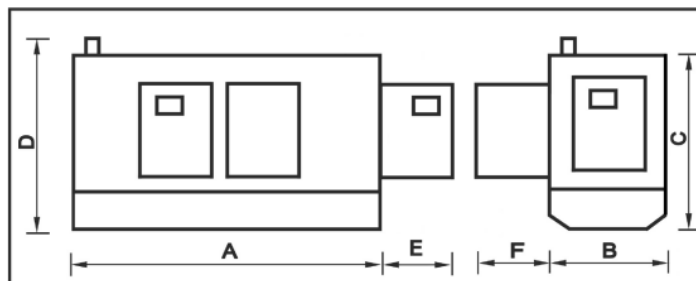

## FEATURES\*

FEATURES*	Manual Start, Main Power Set		Automatic Start, Standby Set	
	Standard	Optional	Standard	Optional
Sound Attenuated, Weatherproof Canopy	✓		✓	
Base Fuel Tank	✓		✓	
DEFRA Bunded Base Fuel Tank (Standard on UK Models)‡		✓		✓
Oil, Fuel & Air Filters	✓		✓	
Coolant Water Heater			✓	
Lube Oil Pump / Drain	✓		✓	
Vibration isolated Control Panel	✓		✓	
Manual Control Panel	✓			
Auto Start Control Panel			✓	
Integral 5A Battery Charger			✓	
Automatic Transfer Panel				✓
12 Months International Warranty	✓		✓	
Output Circuit Breaker	✓		✓	
CE Certification (Standard on UK/ EU Models)		✓		✓
Service / Maintenance Contracts/ Remote Monitoring		✓		✓

\*Specifications subject to change without notice

Unit F, Venture Business Park, Witty Street, Hull, East Yorkshire, HU3 4EL, UK

T: +44 (0) 845 430 9110, F: +44 (0) 1482 222646, E: info@jspower.co.uk, W: www.jspower.co.uk